



ASSA ABLOY

TESA Hotel i-reader

Wireless Online, Update on Card & Openow

Next generation wall reader for Update on card, Wireless system and Openow

Suitable for doors, turnstiles, barriers, elevators or any access in which the locking or blocking element is automated.

The wall reader is managed by a Control Unit / Relay Board. The new i-reader is offered in two sizes: wide (i-reader and i-reader Keypad) and narrow (i-reader Design), ensuring a suitable i-reader for each site.



i-reader

i-reader Keypad

i-reader Design



Control elevator access to up to 40 floors with all i-reader models

Control Unit / Relay Board

Mounted in the secure area inside the building.

The Control Unit / Relay Board enables precise electrical control of the locking mechanism. Thanks to its design, the relay is physically separated from the reader. Secure, encrypted communication between the two ensures protection against unauthorized access.



TESA Hotel i-reader

Specification



Technical data and features



General information

Traffic volume	High
Exterior usage	IP56 (Wall reader) Up to 85% humidity without condensation –20 °C to +70 °C
Keypad	Capacitive and backlit keypad



Electrical specification

Power supply	12–24 V AC / V DC: powered through control unit / relay board Max power consumption (reader + Control Unit / Relay Board): 300 mA @ 12 V / 150 mA @ 24 V Power supply not included
--------------	--



Credentials

Multi-technology	MIFARE Classic and Ultralight ISO 15693 DESFire EV1, EV2 and EV3 Mobile Apps
Compatible mobile solutions	Openow® (Bluetooth Low Energy) TESA Hotel (Remote opening app)
Multi-authentication	Yes. RFID and PIN. Only RFID. Only PIN. RFID + PIN (or PIN + RFID).



Operation

Control Unit / Relay Board	Board, with one relay to manage the door blocking device and two voltage-free extra inputs for: • Request to exit button • Door sensor • It can be connected to an 8 relay board. Up to 5 relays board in series can control up to 40 floors
Upgradability	Wall readers can be upgraded on the field: • To Openow-BLE by Openow activation card/s; no extra hardware required • To Wireless Online by adding RF module to Control Unit / Relay Board



Certifications

Market	CE (EMC, R&TTE), UKCA
Substances and disposal	ROHS, REACH, WEE
External conditions	IP56 and IK09




Installation

Mounting	Reader module is compatible with standard electrical boxes A back plate is included in the i-reader and i-reader Keypad models if surface mounting is needed
Hardware compatibility and installation	• To be combined with electromechanical devices to unlock the door (e.g. electric strike plates, electromagnetic locks) • Voltage free relay. Output: 5A
Connections	CAT5e UTP cable or higher between reader and Control Unit / Relay Board Cable not included

TESA Hotel i-reader

Technical drawings and Electronic technical characteristics

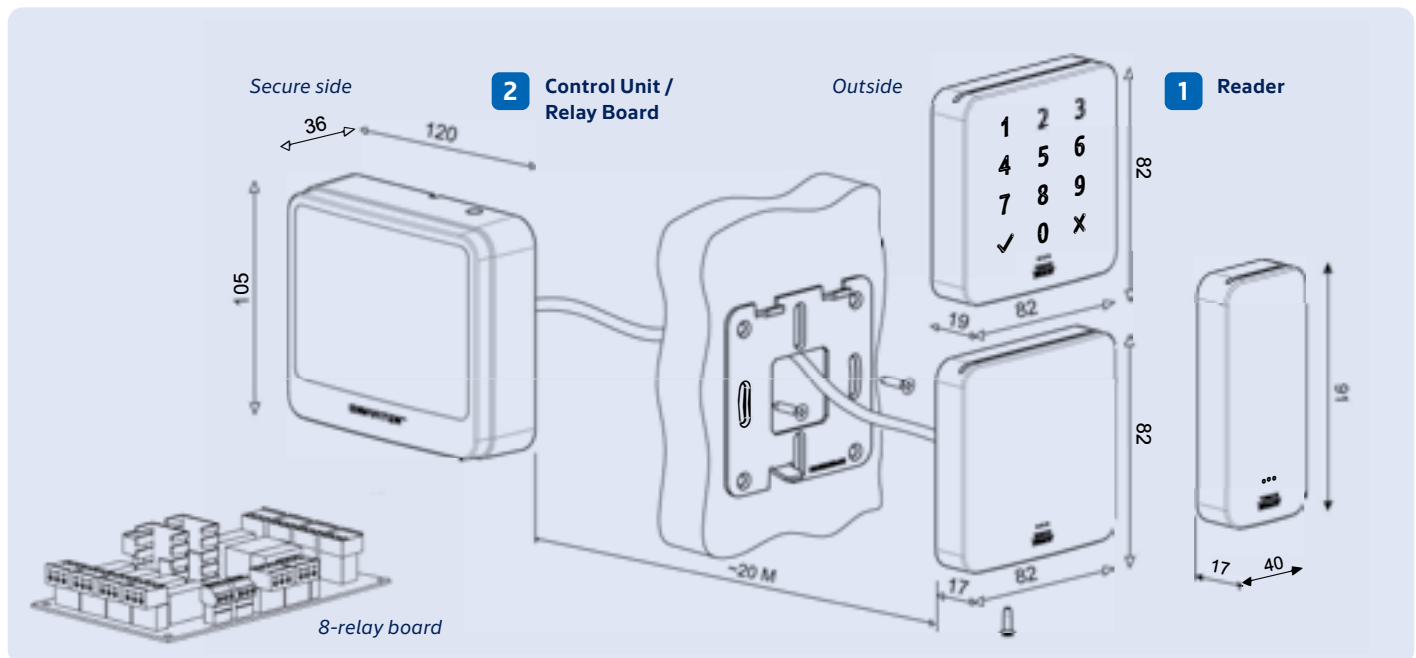

Reader module

- Reading distance: 2–4 cm read/write distance standard RFID credentials. Barriers and gates open when a valid Openow credential is used up to 5 metres away
- 3 PIN connection is available to connect the via portable programmer, PC-To-Lock or i-programmer App
- RFID reader with configurable LED (green/red/blue) and sound buzzer for different warning signals: access authorized or denied, etc.
- Capacitive and Backlit keypad – lights up on touch and fades out, perfect for low-light areas

Control Unit / Relay Board

- Upgradeable firmware
- Non-volatile memory

The wall reader can be programmed to operate in 3 modes:

- Extended mode: 6500 users and 1200 events
- Normal mode: 3000 users and 1200 events
- High traffic door: unlimited number of users filtered into 48 groups (permissions)

Real-time clock and calendar:

- 30 time zones with 5 time periods (week days and holidays selectable)
- 365-day calendar for defining holidays
- Automatic DST: Daylight Saving Time change, updated with calendar
- Maintains clock/calendar for 8 hours without power supply



TESA Hotel i-reader

Electronic technical characteristics



Operating modes:

You can configure up to 20 changes of operating modes per door per day (state tables):

- **Standard:** Default operating mode. Closed until valid credential (RFID, mobile or PIN) presented, then allows to open the door for 1 to 240 seconds (configurable)
- **Keypad mode:** PIN only. The door remains locked until a valid PIN is entered on the keypad, then unlocks
- **Passage mode:** Door is always in open mode (configured by time zones or by authorized user after double badging)
- **Double user:** Two valid credentials needed to open the door
- **First user:** Door in standard mode until first valid user enters, then will remain in passage mode
- **Card + PIN Mode:** Requires both RFID credential and associated PIN. The door remains locked until both are presented, then unlocks
- **PIN + Card Mode:** Requires PIN entry first, followed by the associated RFID credential. The door remains locked until both are provided, then unlocks



Special features:

- People with disabilities (PWD): Standard with double opening time
- Models for elevators in buildings with up to 40 floors



Wireless online:

RF Module (connected to Control Unit / Relay Board):

- 868 MHz, 902 MHz, 915 MHz or 922 MHz selectable in field
- 30 configurable channels
- Auto-link with communication Hubs (easy setup)



Openow:

Low Energy Bluetooth 5.1



Mounting:

- The Control Unit / Relay Board is supplied in a box that allows surface mounting with a universal electrical box


TESA Hotel i-reader

Electronic technical characteristics



Connections:

- Connector for reader
- Power supply 12–24 AC / V DC connector
- Door position (sensor not included): Intrusion or door left open will be reported
- Request to exit (push button not included)
- 1 output relay (NO, C, NC) to command the electrical / electromechanical door device
- Voltage free relay. Output: 5A
- Wireless RF module connector
- Connector for 8-relay board (available in specific i-reader models)

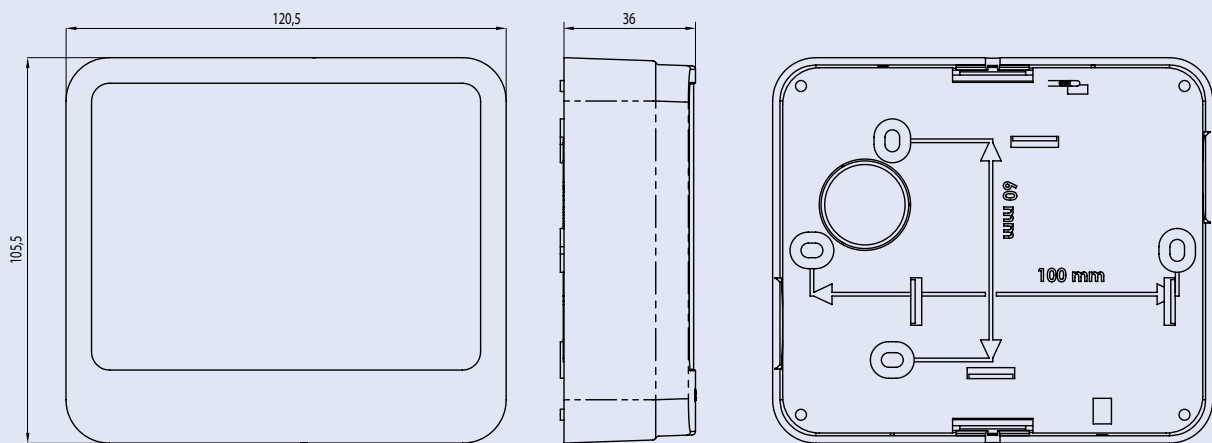

© Images: All rights reserved by ASSA ABLOY.
We reserve the right to make technical modifications.
Version: TESA_TESA-Hotel_i-reader-keypad_Datasheet_2026-06_EMEIA

TESA ASSA ABLOY
Talleres de Escoriaza, S.A.U.
Barrio Ventas, 35
20305 Irun · Gipuzkoa
Spain

Tel.: +34 943 669 100
www.tesa.es
www.assaabloy.com